

GLASSWASHER WITH WATER SOFTENER

Model: ESICWPB6

Article no: 402224

Power supply: 230V 1Ph ~60Hz

Undercounter glasswasher with double skin cabinet and built-in water softener. Insulated double-skin door construction preserves heat inside the tank to lower energy consumption and noise.

This model has a built-in rinse aid with automatic initial and continuous cycle loading for perfect results while minimizing service and maintenance needs. The dishwasher also features a built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external boiler is required.

The washing system has rotating washing arms from both top and bottom, a high-powered wash pump, and a large capacity wash tank that guarantees professional washing. There is also an extra program to cold rinse beer and wine glasses, providing sanitized glasses that are cool enough to handle.

Deep drawn pressed wash tank with fully rounded corners, sloped towards the drain to prevent dirt buildup, provides fast drainage in just a few minutes. With no welding points, the pressed tank offers a guaranteed water-tight solution.

The model has easy service access to main components without moving the unit.

MAIN FEATURES

- Maximum capacity of 30 racks per hour
- Low noise level
- Drain pump
- Wash temperature: 55-65°C.
- Rinse temperature: 80-90 °C

ESICWPB6, 402224

15-01-24 (14:03)

Subject to change without notice
For correct installation, refer to the installation manual

TECHNICAL DATA

ESICWPB6, 402224, 15-01-24 (14:03)

Model Number Specific	ESICWPB6
Voltage (V)	230
Phase	1
Frequency (Hz)	60
Loading (kW)	3,3
IP Class	X4
Capacity (racks/h)	30
Width, net (mm)	460
Depth, net (mm)	565
Height, net (mm)	715
Weight, net (kg)	37
Weight, gross (kg)	48
Volume, net (m3)	0,19
Volume, gross (m3)	0,24
Connection Cable, length (m)	1,5
Plug type	None
Cold water inlet, diameter (")	G 3/4
Cycle time (s)	120
Dishwashing racks	1
Drain pipe, diameter (mm)	27
Drain pump	Yes
Installation, type	Floor model
Noise level <(dB)	69
Other general information	Water supply temperature: 10-55 °C
Rinse pump incl.	Yes
Temperature, max (°C)	90
Water consumption (L/cycle)	2,3
Water pressure, max (Bar)	3
Water pressure, min (Bar)	1,8

Loipart AB (HQ), Sweden
Tel. +46 313 920 100, loipart@loipart.se

LMG Finland oy, Finland
+358 40 664 6680, lmg@lmg.fi




Loipart USA inc, USA
Tel. +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, Singapore
Tel. +65 674 99 100, contact@loipart.sg

Visit us at www.loipart.com

DIMENSIONS

Model: ESICWPB6 Rev. 1

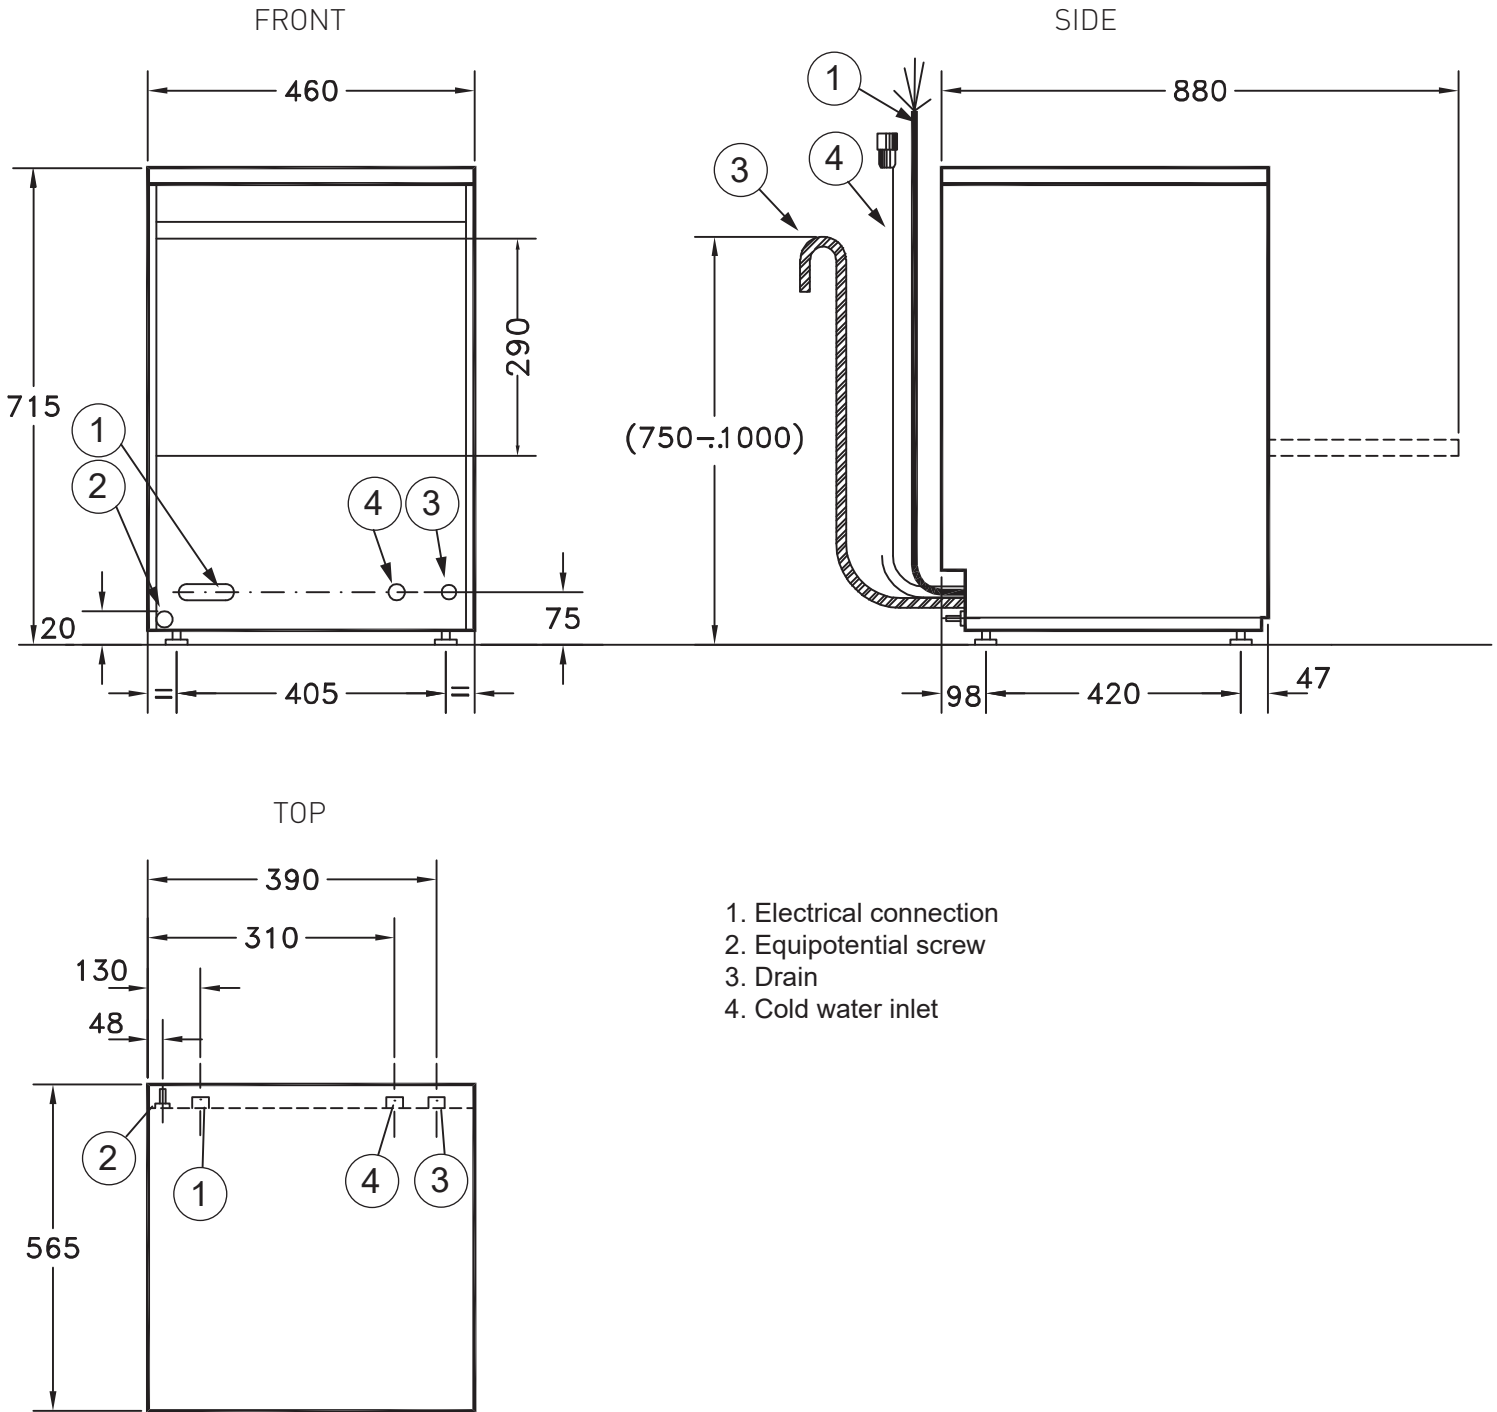

- 1. Electrical connection
- 2. Equipotential screw
- 3. Drain
- 4. Cold water inlet

DETAIL MARINE FOOT

