



## REFRIGERATOR 115L, L.H. DOOR

Model: C115L-L

Article no: 9S0895

Power supply: 230V 1Ph ~50/60Hz

Compressor type cooling. Manual defrost. 17 ltrs freezer compartment.  
Lockable door. 2 storage shelves.  
White enamelled housing.  
R134a

C115L-L, 9S0895  
12-02-24 (12:22)

Subject to change without notice  
For correct installation, refer to the installation manual

## TECHNICAL DATA

C115L-L, 9S0895, 12-02-24 (12:22)

<b>Model Number Specific</b>	C115L-L
<b>Voltage (V)</b>	230
<b>Phase</b>	1
<b>Frequency (Hz)</b>	50/60
<b>Loading (kW)</b>	0,07
<b>IP Class</b>	22
<b>Width, net (mm)</b>	525
<b>Depth, net (mm)</b>	560
<b>Height, net (mm)</b>	765
<b>Weight, net (kg)</b>	34
<b>Weight, gross (kg)</b>	38
<b>Volume, net (m3)</b>	0,22
<b>Volume, gross (m3)</b>	0,29
<b>Connection Cable, length (m)</b>	1,9
<b>Plug type</b>	Schuko
<b>Certifications</b>	CE
<b>Door Hanging</b>	Left
<b>Door, type</b>	Colored
<b>Exterior</b>	Colored
<b>Locking device, included</b>	Yes
<b>Refrigerant type</b>	R134a

Loipart AB (HQ), **Sweden**  
Tel. +46 313 920 100, loipart@loipart.se

LMG Finland oy, **Finland**  
+358 40 664 6680, lmg@lmg.fi




Loipart USA inc, **USA**  
Tel. +1 954 530 5276, loipartusa@loipart.com

Loipart SEA Pte Ltd, **Singapore**  
Tel. +65 674 99 100, contact@loipart.sg

Visit us at [www.loipart.com](http://www.loipart.com)

# DIMENSIONS

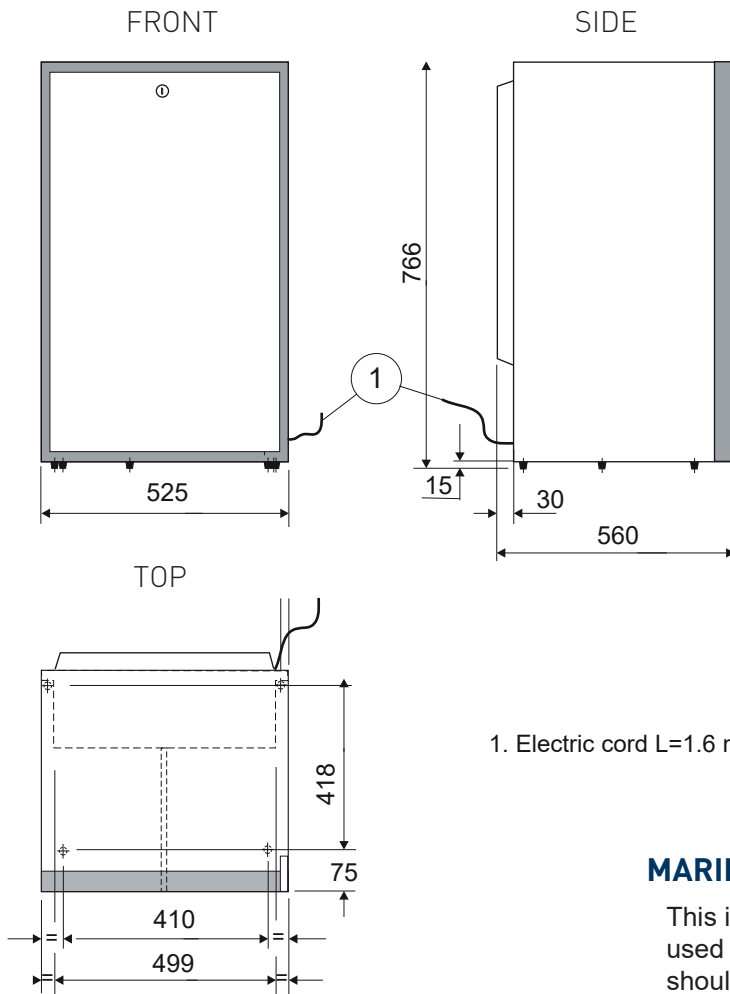

VITRIFRIGO C115



**117 kWh/annum**

**17 L**

**98 L**

**33dB**  
A B C D

91020102

1. Electric cord L=1.6 m with plug

## MARINE INSTALLATION



This is a domestic type refrigerator. The unit can be used freestanding or built-in, and the large models should be secured from moving with the brackets A and B acc. the separate Installation instruction (a part of delivery) or acc. to the instruction for shipboard installation.

### Electrical

The unit is delivered with a 1.6 m long earthed 3-wire cord provided with an earthed plug. The plug is to be replaced if necessary to follow ships code.

### Installation – building-in.

Good air circulation is absolutely essential for a built-in refrigerator. The ventilation air passage above and under should be at least 300 cm<sup>2</sup> in cross- section.

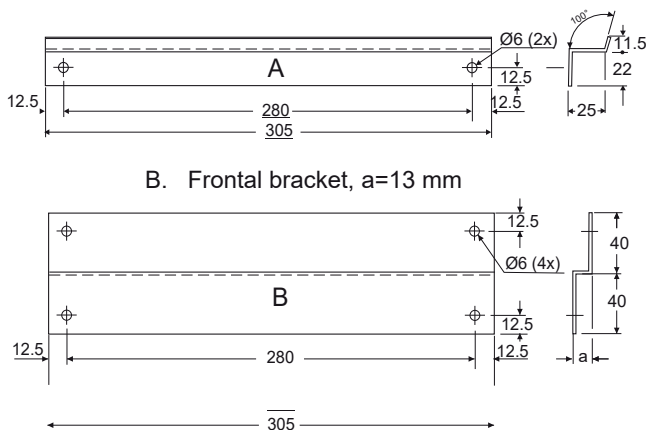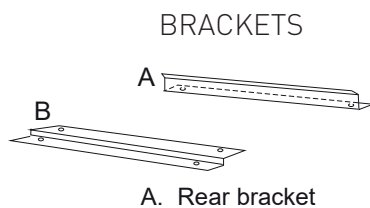

## INSTALLATION EXAMPLES

